


Maximum 10 mm clearance between FFL and bottom of fire door



Fire rated door


Nominal thickness: 35 mm / 45 mm

Skins: MDF / PLY / DUR

Non-rated solid core door

Nominal thickness: 35 mm / 40 mm / 45 mm

Skins: MDF / PLY / DUR

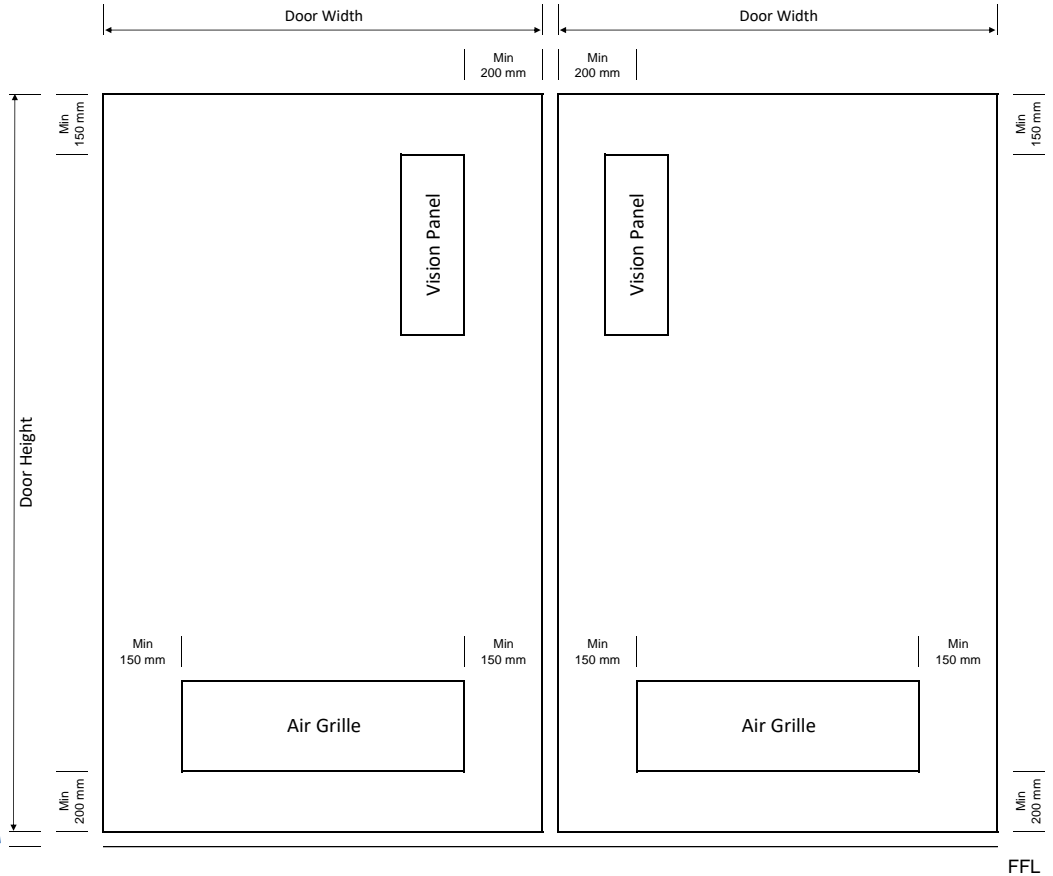

Maximum 10 mm clearance between FFL and bottom of fire door



Rebated door can be used with / without meeting stile (i.e. : RP16)



Non rebated door can be used with / without meeting stile (i.e. : RP16)



T-Bar or Bullnose meeting stile is required all fire rated double door

Protec Doors Pty/Ltd

ABN: 64 102 467 461
 93 Rookwood Road, Yagoona, NSW
 Tel: 02 96322999
 Email: sales@protecdoors.com.au
 Web: www.protecdoors.com.au

Frame Details and Specifications	Drawing No: PRO-DR-001
	Door details

* All rights reserved by Protec Doors Pty Ltd

